

ROUND SPOUTING

PREMIER COMPONENTS SPOUTING IS FIRST RUN MATERIAL - NO SECONDS!

ALL SPOUTING IS AVAILABLE IN 20' OR 40' LENGTHS.

Premier Components, Inc. has the best spouting and accessory prices in the industry. Contact us for unbeatable prices and unsurpassed customer service.

WE WILL NOT BE UNDERSOLD!

GALVANIZED ROUND SPOUTING

SIZE	PRICE PER FOOT					
	14ga.	12ga.	11ga.	10ga.	7ga.	1/4"
4"	⊗	⊗				
5"	⊗	⊗				
6"	⊗	⊗	⊗	⊗		
8"	⊗	⊗	⊗	⊗	⊗	⊗
10"		⊗	⊗	⊗	⊗	⊗
12"		⊗		⊗	⊗	⊗
14"				⊗	⊗	⊗
16"				⊗	⊗	⊗
18"					⊗	⊗
20"						⊗
24"						⊗

PLEASE CALL FOR PRICING ON HIGHLIGHTED SIZES


CARBON STEEL ROUND SPOUTING

SIZE	PRICE PER FOOT					
	14ga.	12ga.	11ga.	10ga.	7ga.	1/4"
4"	⊗	⊗				
5"		⊗				
6"	⊗	⊗	Call	⊗		
8"	⊗	⊗	Call	⊗	⊗	⊗
10"		⊗	⊗	⊗	⊗	⊗
12"		Call		⊗	⊗	⊗
14"		Call		⊗	⊗	⊗
16"		Call		⊗	⊗	⊗
18"						⊗
20"						⊗
24"						⊗

PLEASE CALL FOR PRICING ON HIGHLIGHTED SIZES

STAINLESS STEEL SPOUTING

SIZE	PRICE PER FOOT			
	14ga.	12ga.	11ga.	10ga.
4"	⊗	⊗		⊗
6"	⊗	⊗	⊗	⊗
8"	⊗	⊗	⊗	⊗
10"	⊗	⊗	⊗	⊗
12"	⊗	⊗		⊗
14"		⊗		⊗
16"		⊗		⊗

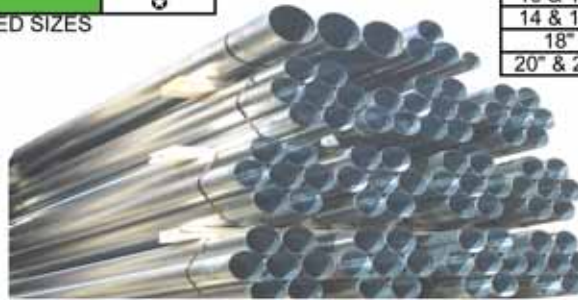

SEE PAGE 16 FOR STAINLESS STEEL ACCESSORIES.

GALVANIZED PIPE SIZE SPOUTING

SIZE	PRICE PER FOOT	
	10ga.	7ga.
6-5/8"	Call	Call
8-5/8"	Call	Call
10-3/4"	Call	Call
12-3/4"	Call	Call

CARBON STEEL PIPE SIZE SPOUTING

SIZE	PRICE PER FOOT	
	10ga.	7ga.
6-5/8"	Call	Call
8-5/8"	Call	Call
10-3/4"	Call	Call
12-3/4"	Call	Call

PRIMER CHARGES PER LINEAL FOOT

SIZE	20'	40'
4, 6, & 8"	⊗	⊗
10 & 12"	⊗	⊗
14 & 16"	⊗	⊗
18"	⊗	⊗
20" & 24"	⊗	⊗

TUFF-TUBE SPOUT LINERS



Tuff-Tube is an innovative, wear-resistant, seamless, polyurethane spout liner that comes in any size diameter, up to 20' lengths for new or existing spouting applications. This exciting new product is a replaceable slip-in urethane liner that counters material wear to spout lining--saving time and money and extending useful life of equipment by reducing down time. Worn liner can be rotated 120° - 180° to present additional wear surface. Completely used liner can be removed and replaced using the same spout. Contact Premier Components for pricing, availability and further specifications.

ROUND SPOUTING CAPACITY APPROXIMATIONS

SIZE	In'	BPH
6"	28.3	1,500
8"	50.3	3,500
10"	78.5	5,500
12"	113.1	8,000
14"	154.0	10,500
16"	201.1	14,000
18"	254.5	18,000
20"	314.2	22,000
24"	452.3	32,000

SIDEWALL THICKNESS

14ga. = 0.0747"
12ga. = 0.1046"
11ga. = 0.125"
10ga. = 0.1345"
7ga. = 0.1793"
1/4" = 0.25"

ROUND SPOUTING WEIGHTS

O.D. SIZE	POUNDS PER LINEAL FOOT					
	14ga.	12ga.	11ga.	10ga.	7ga.	1/4"
4"	3.2	4.5		5.7		
5"	4.0	5.6		7.2		
6"	4.8	6.8		8.6	11.6	15.3
6-5/8"				9.6		
7"		7.9		10.1		
8"	6.5	9.0	10.3	11.6	15.6	20.7
8-5/8"				12.1	16.9	
10"		11.3	12.8	14.5	19.7	26.0
10-3/4"				15.6	21.2	
12"		13.3		17.5	23.7	31.4
12-3/4"				18.6	25.2	
14"		15.9		20.4	27.7	36.7
16"		18.2		23.4	31.7	42.1
18"						48.0
20"						53.0
24"						64.0

SEE PAGE 28 FOR SPOUT VELOCITY RECOMMENDATIONS.

www.premier-com.com

877-681-3064