



BMRX POWER PACS

MODEL	VOLTAGE	DESCRIPTION	PRICE
BMRX-115	115 VAC	BinMaster Rotary Level Indicator, Triple Thread Screw Off Cover, Dual Conduit Entries, DPDT Relay Contacts, Selectable Fail-Safe Protection, USDA Approved Powder Coated Finis, Hazardous Location Approved, C/US listed for Class I, Groups C & D and Class II, Groups E, F & G.	✪
BMRX-230	230 VAC		✪
BMRX-24AC	24 VAC		✪
BMRX-24DC	24 VDC		✪
BMRX-12DC	12 VDC		✪

MAXIMA+ FAIL-SAFE POWER PACS

MODEL	VOLTAGE	DESCRIPTION	PRICE
MAXIMA+ AC	24/115/230 VAC	Hazardous Location Approved, C/US listed for Class II Groups E, F, G. Visual L.E.D. status light monitoring paddle rotation, paddle covered, fault conditions, complete with D.P.D.T. Relay Contacts, Fail-Safe protection, and S.P.D. T. Normal and Fault Relay contact, USDA Approved Powder Coated Finish	✪
MAXIMA+ 24 DC	24 VDC		✪
MAXIMA+ 12 DC	12 VDC		✪

MAXIMA+ SOLID STATE STATUS RELAY OPTIONS

To Order Maxima+ Solid State Relay Option select the Maxima+ Power Pac part number and add the options Order Code at the end of the part number. Example A730-0528-SSR-1 would be a Maxima+ with 1 A250 VAC Solid State Relay.

ORDER CODE	DESCRIPTION	PRICE
SSR-1	1A 250 VAC Solid State Status Relay Option for Pulse Mode Operation	✪
SSR-2	1A 60 vdc Solid State Status Relay Option for Pulse Mode Operation	✪

SHAFT COUPLERS

MODEL	DESCRIPTION	PRICE
GRSS-1	Solid Shaft -316 Stainless Steel Side Mount Coupler	✪
GRFC-1	Flexible -316 Stainless Steel Top Mount Coupler	✪
BSA	Indicator Shaft Adapter - 316 Stainless Steel	✪
GRFS-1	Molded Neoprene Flexible Shaft - 316 Stainless Steel Top or Side Mount Coupler	✪

SIDE MOUNTING PLATES

MODEL	DESCRIPTION	PRICE
GRMP-1	0° Mild Carbon Steel Half Coupling w ith fiber gasket	✪
GRMP-3	0° 316 Stainless Steel Half Coupling w ith fiber gasket	✪

TOP MOUNTING PLATES

MODEL	DESCRIPTION	PRICE
GRMP-2	0° Mild Carbon Steel Full Coupling w ith fiber gasket	✪
GRMP-4	0° 316 Stainless Steel Full Coupling w ith fiber gasket	✪
GRMP-9	10° Mild Carbon Steel Full Coupling Pow der Coated w ith fiber gasket	✪
GRMP-13	30° Mild Carbon Steel Full Coupling Pow der Coated w ith fiber gasket	✪

PADDLES


MODEL	DESCRIPTION	PRICE
GRP-11	High Strength Nylon Paddle for materials up to 30 lbs./ft ³ , triple bladed paddle turns in Ø7", blades are 2" wide	✪
GRP-12	High Strength Nylon Paddle for materials 30 to 70 lbs./ft ³ , triple bladed paddle turns in Ø5"	✪
GRP-1	For light materials up to 30 lbs./ft ³ , triple bladed 316 Stainless steel Paddle turns in a Ø7", paddle blades are 2" wide	✪
GRP-2	For medium materials from 30 to 70 lbs./ft ³ , 3 bladed 316 Stainless Steel Paddle turns in a Ø5", paddle blades are 1 1/2" wide	✪
GRP-3	For heavy materials +70 lbs./ft ³ , 1blade 316 SS Paddle 2 1/2" long & turns in a Ø5", insertable paddle blade is 1" x 1/8"	✪
GRP-22	For heavy materials +70 lbs./ft ³ , 3 bladed 316 SS Paddle turns in a Ø5", paddle blades are 1" x 1/8"	✪
GRP-23	For medium and heavy materials, 1bayonet blade, 316 SS Paddle, insertable paddle blade is 1" x 1/8"	✪
GRP-24	12" Belt Paddle for use in heavy materials with large particle size	✪
GRP-25	For very light materials, 3 bladed 316 SS Paddle turns in a Ø5", paddle blades are 5" x 1/16"	✪
GRP-26	Direct connect (eliminates need for GRSS-1Coupler) version of GRP-1	✪
GRP-27	Direct connect (eliminates need for GRSS-1Coupler) version of GRP-23	✪
GRP-28	For extremely light materials, 3 bladed 316 SS paddles turn in a Ø7", paddle blades are 5" x 1/16"	✪
GRP-29	Direct connect (eliminates need for GRSS-1Coupler) version of GRP-25	✪
GRP-30	Direct connect (eliminates need for GRSS-1Coupler) version of GRP-2	✪
GRP-31	Single blade SS Paddle 3-1/4" long and turns in Ø6.5", paddle blade is 1/8" x 163"	✪
GRP-34	Direct connect 1/2" wide single blade paddle folds through a 1 1/4" or 1 1/2" process connection, Ø7.5"	✪
GRP-35	Direct connect 1/2" wide double blade paddles fold through a 1 1/4" or 1 1/2" process connection, Ø7.5"	✪

1/4" Galvanized Shaft Extensions	
LENGTH	PRICE
6"	✪
12"	✪
18"	✪
24"	✪
30"	✪
36"	✪
48"	✪
60"	✪
63"	✪
72"	✪
84"	✪

1/4" 316 Stainless Steel Shaft Extensions	
LENGTH	PRICE
6"	✪
12"	✪
18"	✪
24"	✪
30"	✪
36"	✪
48"	✪
60"	✪
72"	✪
84"	✪

1 1/4" Galvanized Guard Pipe	
LENGTH	PRICE
18"	✪
24"	✪
30"	✪
36"	✪
48"	✪
60"	✪
63"	✪
72"	✪
84"	✪

1 1/4" 316 Stainless Steel Guard Pipe	
LENGTH	PRICE
18"	✪
24"	✪
30"	✪
36"	✪
48"	✪
60"	✪
63"	✪
72"	✪
84"	✪

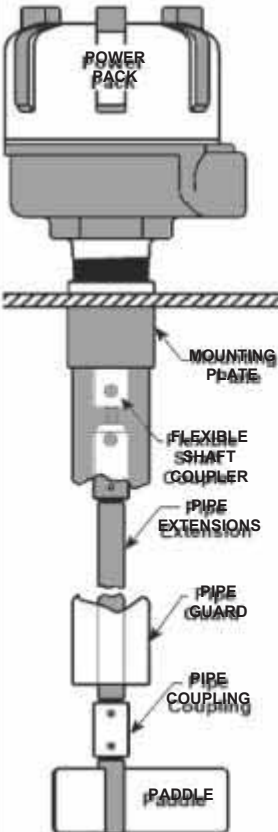

BIN MASTER BIN LEVEL CONTROLS